

Lecture 21: Link Layer

COMP 332, Fall 2018

Victoria Manfredi

WESLEYAN
UNIVERSITY



Acknowledgements: materials adapted from Computer Networking: A Top Down Approach 7th edition: ©1996-2016, J.F Kurose and K.W. Ross, All Rights Reserved as well as from slides by Abraham Matta at Boston University, and some material from Computer Networks by Tannenbaum and Wetherall.

Today

1. Announcements

- hw7 programming due Thursday at 11:59p
- hw8 due Monday at 11:59p
- hw9 posted, due next Wednesday at 11:59p

2. Link layer

- overview
- MAC addresses
- Address Resolution Protocol (ARP)
- switches

Link Layer

OVERVIEW

Internet protocol stack

Protocols

- HTTP, DNS, DHCP, TLS, ...

- TCP, UDP, QUIC, ...

- IP, routing protocols (BGP, OSPF, RIP, ...)

- Ethernet, 802.11, ...

- Ethernet phy, 802.11 phy, ...

Service provided


- Support network applications

- Deliver msgs to app endpoints, flow control, reliability

- Route segments from source to destination host (indirect)

- Move pkt over link from one host to next host (direct)

- Move individual bits in frame from one host to next

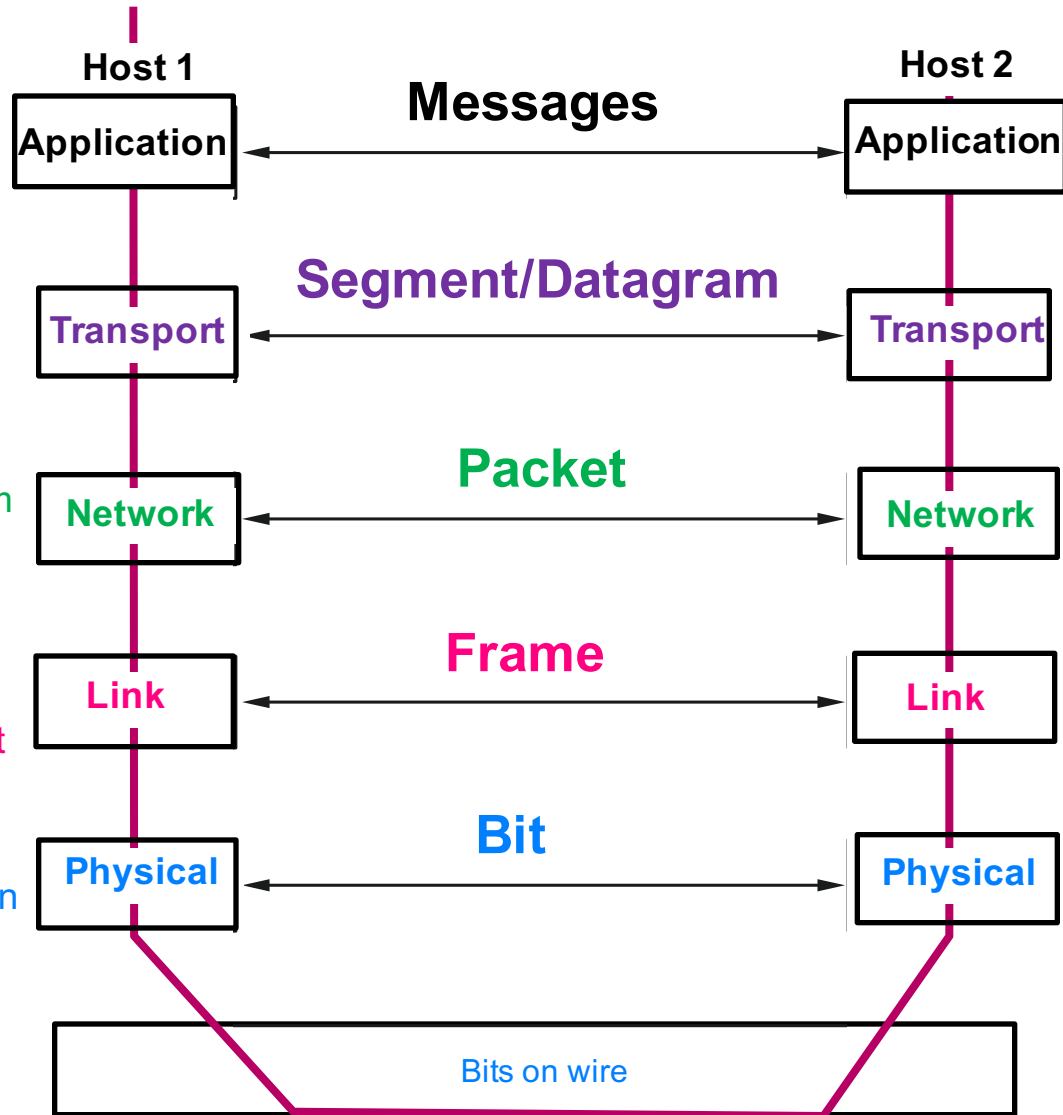


Link layer

Goal

- divide packet up into frames, transfer frame across link

Different link media have different characteristics

- will use different protocols with different services to transfer frame
- e.g., in local area network (LAN), frames broadcast to every device

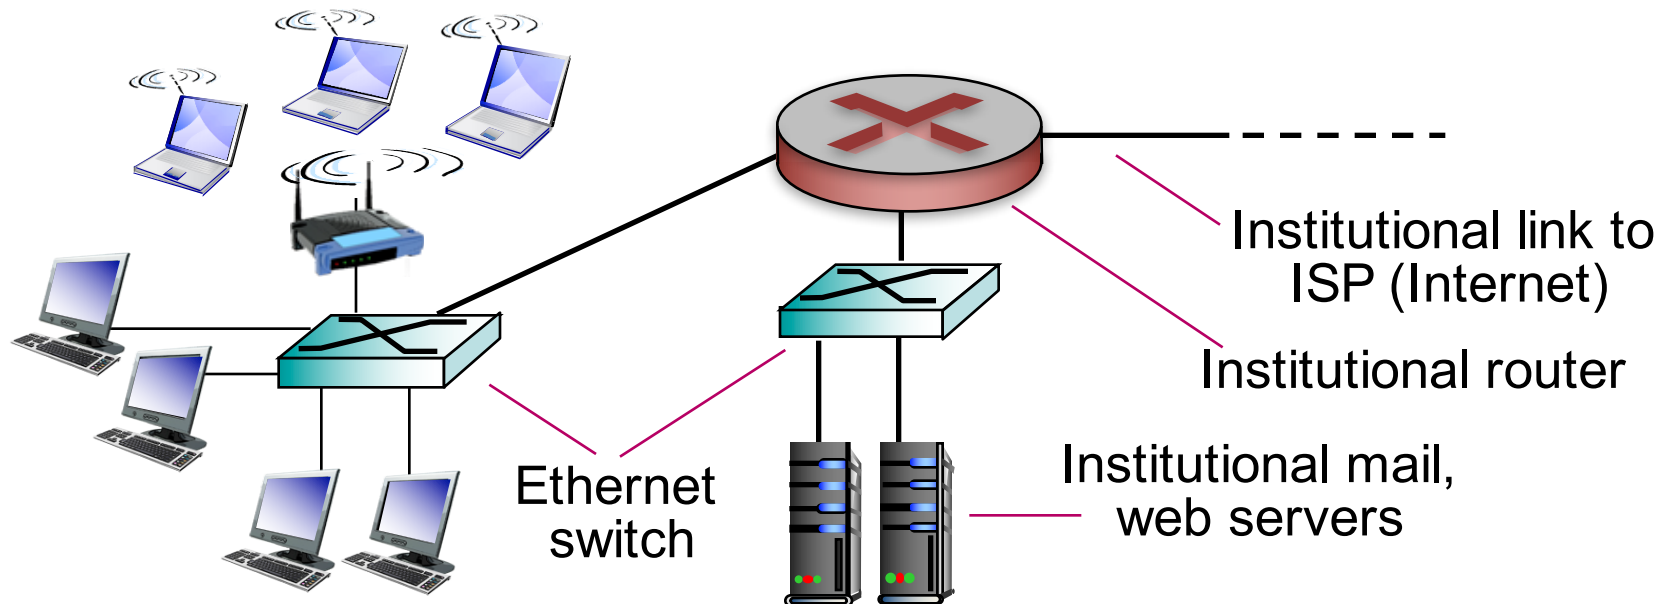

Link layer services

Framing

- encapsulate packet into frame
- add header, trailer to detect start/end of frame

Link access

- if shared media like wireless link, how to share?
 - time/freq division, random access, ...
- MAC addresses in frame headers identify src, dst
 - different from IP address, only used within network

Reliable delivery between 2 end hosts of link

- low-bit error links rarely use: fiber, some twisted pair
- high bit error: wireless link

Q: why both link-level and end-end reliability?

What if error on last hop to dst?

Other link layer services

Flow control

- **pacing** between adjacent sending and receiving nodes

Error detection

- errors caused by **signal attenuation, noise, interference, ...**
- receiver detects presence of errors, e.g., via **checksum**
 - signals sender for retransmission or drops frame

Error correction

- receiver identifies and corrects bit error(s)
- don't necessarily need to retransmit: instead use **coding**

Half-duplex vs. full-duplex

- half duplex, e.g., wireless link
 - nodes at both ends of link can transmit, but not at same time

Where is the link layer implemented?


In network interface card (NIC) or on chip

- Ethernet card
- 802.11 card
- Ethernet chipset

Implements

- link layer
- physical layer: e.g., transmit radio wave

Attaches into system buses on host's system

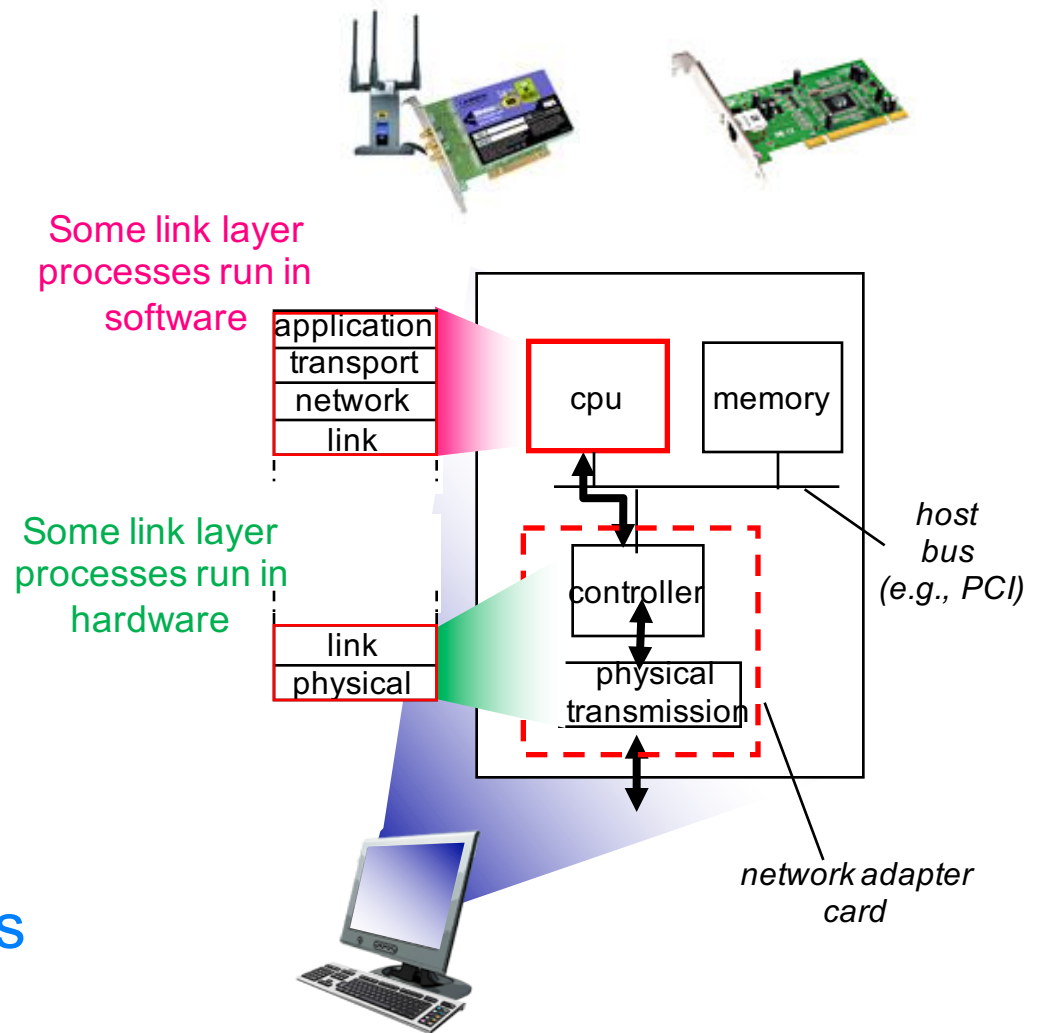


Communication between network interfaces

Sender

- encapsulates pkt in frame
- adds error checking bits, rdt, flow control, ...

Receiver

- looks for errors, rdt, flow control, ...
- extracts pkt, passes to upper layer at receiving side

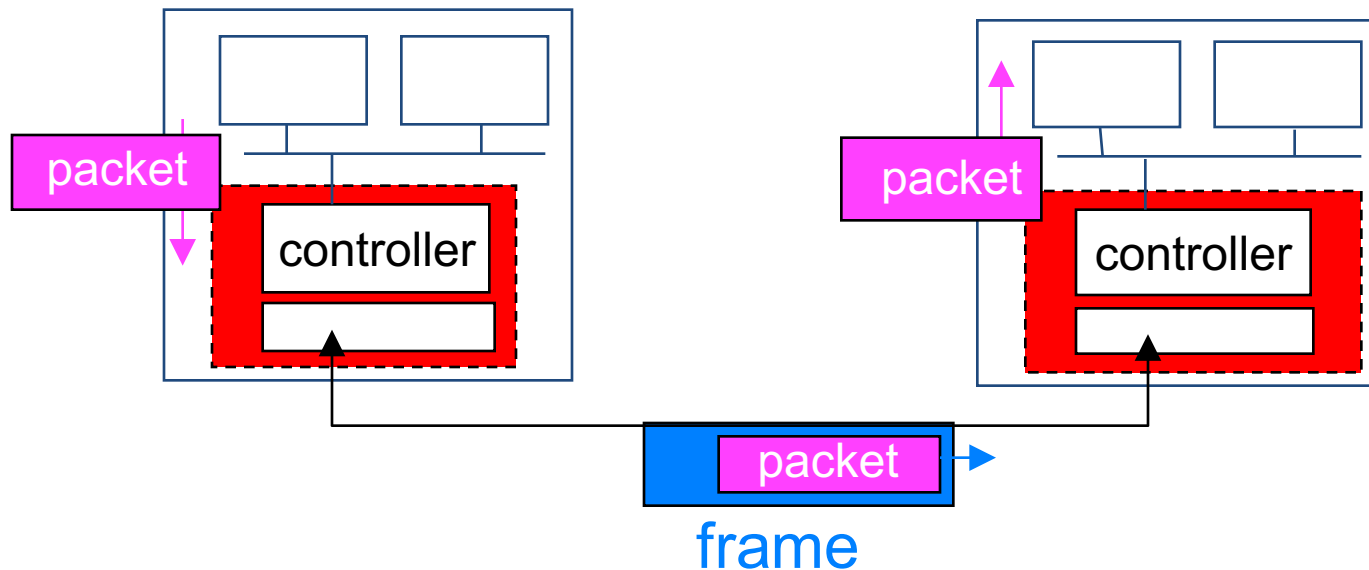

Link Layer

MAC ADDRESSES

MAC addresses

32-bit IP address

- **software address**: network-layer address for interface
- used for **layer 3 (network layer)** forwarding

48-bit MAC address

- link-layer address for interface
 - aka hardware, Ethernet, LAN, or physical address
 - e.g., **1A-2F-BB-76-09-AD**
 - burned in NIC read only memory, also sometimes software settable
- used for **layer 2 (link layer)** forwarding
 - get frame from one interface to another physically-connected interface

Why both MAC and IP addresses?

IP address: like postal address

- hierarchical address: not portable
- changes with location
 - address depends on IP subnet to which node is attached

MAC address: like SSN

- flat address: portable
- does not change with location
 - can move LAN card from one LAN to another

LANs designed for arbitrary network layer protocol, not just IP

- don't want to pass frame up to network layer for every frame
 - faster, even if on same LAN to not go up to network layer


Your MAC address

```
> ifconfig
lo0: flags=8049<UP,LOOPBACK,RUNNING,MULTICAST> mtu 16384
    options=1203<RXCSUM,TXCSUM,TXSTATUS,SW_TIMESTAMP>
    inet 127.0.0.1 netmask 0xff000000
    inet6 ::1 prefixlen 128
    inet6 fe80::1%lo0 prefixlen 64 scopeid 0x1
    nd6 options=201<PERFORMNUD,DAD>
gif0: flags=8010<POINTOPOINT,MULTICAST> mtu 1280
stf0: flags=0<> mtu 1280
en0: flags=8863<UP,BROADCAST,SMART,RUNNING,SIMPLEX,MULTICAST> mtu 1500
    ether 78:4f:43:73:43:26
    inet6 fe80::1c8d:4bcb:b52d:9d1d%en0 prefixlen 64 secured scopeid 0x5
    inet 129.133.187.174 netmask 0xfffff000 broadcast 129.133.191.255
```

- ▶ Frame 264: 1440 bytes on wire (11520 bits), 1440 bytes captured (11520 bits) on interface 0
- ▼ Ethernet II, Src: JuniperN_1e:18:01 (3c:8a:b0:1e:18:01), Dst: Apple_73:43:26 (78:4f:43:73:43:26)
 - ▶ Destination: Apple_73:43:26 (78:4f:43:73:43:26)
 - ▶ Source: JuniperN_1e:18:01 (3c:8a:b0:1e:18:01)
 - Type: IPv4 (0x0800)
- ▶ Internet Protocol Version 4, Src: a104-96-210-190.deploy.static.akamaitechnologies.com (104.96.210.190)
- ▶ Transmission Control Protocol, Src Port: 443, Dst Port: 57106, Seq: 730864352, Ack: 3232279727, Len: 100

LAN addresses and ARP

Each adapter on LAN has unique LAN address

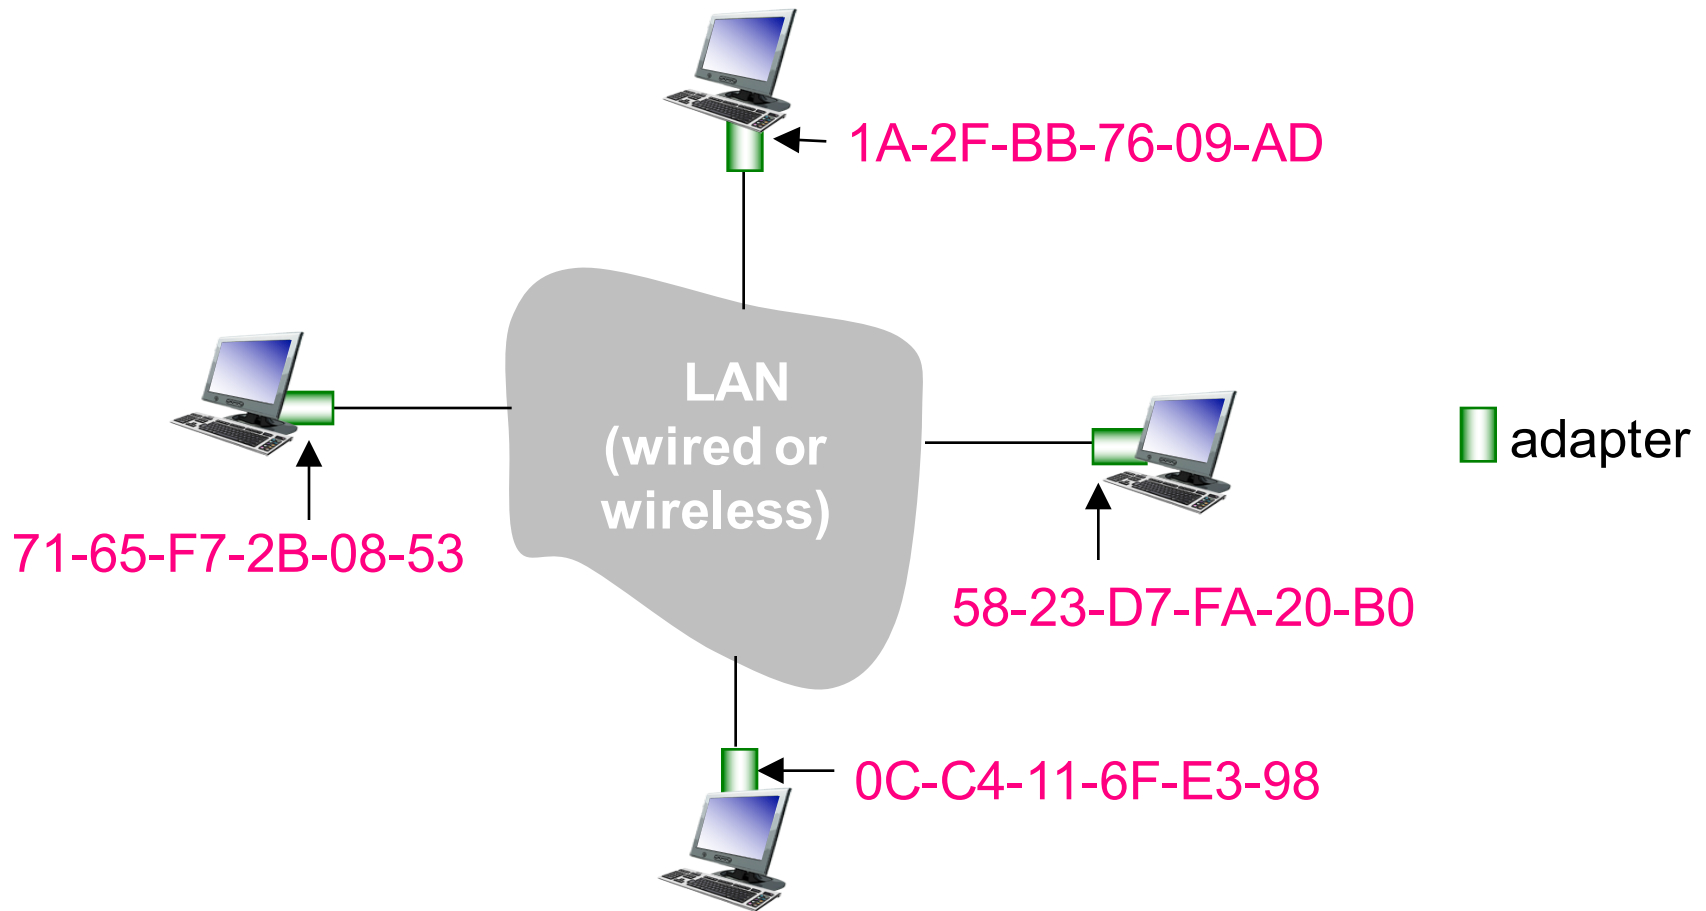


Link Layer

ADDRESS RESOLUTION PROTOCOL

Address Resolution Protocol (ARP)

ARP

- link layer protocol that translates between MAC and IP addr
- ARP table in every IP device on LAN
 - <IP addr; MAC addr; TTL>
 - TTL: time after which addr mapping forgotten (typically 20 min)

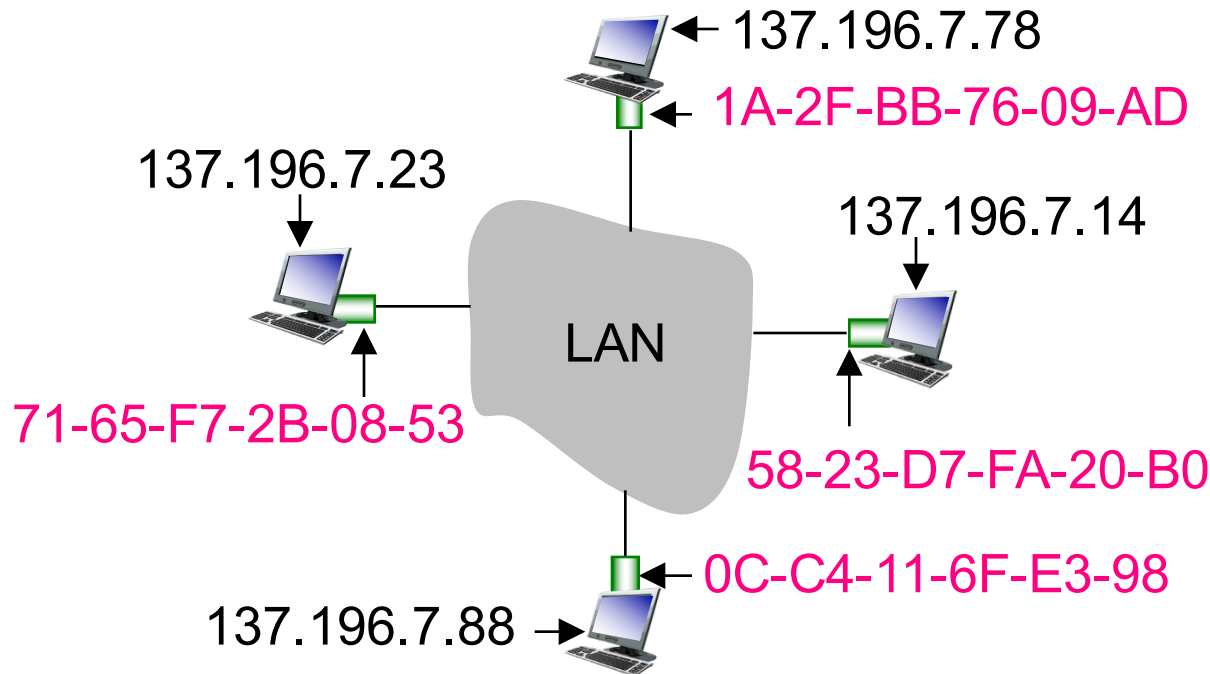

ARP in wireshark

No.	Time	Source	Destination	Length	Info
5406	48.129810	Apple_73:43:26	6e:57:ca:90:05:64	42	Who has 172.20.10.1? Tell 172.20.10.11
5410	48.153207	Apple_73:43:26	6e:57:ca:90:05:64	42	Who has 172.20.10.1? Tell 172.20.10.11
5413	48.193996	Apple_73:43:26	6e:57:ca:90:05:64	42	Who has 172.20.10.1? Tell 172.20.10.11
5416	48.277611	Apple_73:43:26	6e:57:ca:90:05:64	42	Who has 172.20.10.1? Tell 172.20.10.11
5417	48.280822	6e:57:ca:90:05:64	Apple_73:43:26	42	172.20.10.1 is at 6e:57:ca:90:05:64
5418	48.281053	Apple_73:43:26	Broadcast	42	Gratuitous ARP for 172.20.10.11 (Request)
5423	48.376210	Apple_73:43:26	Broadcast	42	Who has 172.20.10.1? Tell 172.20.10.11
5424	48.377694	6e:57:ca:90:05:64	Apple_73:43:26	42	172.20.10.1 is at 6e:57:ca:90:05:64
5661	51.723958	vmanfredis-MacBook-Pro-2.l...	Broadcast	42	Who has 172.20.10.1? Tell 172.20.10.11
5662	52.043516	vmanfredis-MacBook-Pro-2.l...	Broadcast	42	Gratuitous ARP for 172.20.10.11 (Request)
5696	52.217609	6e:57:ca:90:05:64	vmanfredis-MacBoo...	42	172.20.10.1 is at 6e:57:ca:90:05:64
5721	52.367215	vmanfredis-MacBook-Pro-2.l...	Broadcast	42	Who has 172.20.10.1? Tell 172.20.10.11
5802	52.483589	6e:57:ca:90:05:64	vmanfredis-MacBoo...	42	172.20.10.1 is at 6e:57:ca:90:05:64

- ▶ Frame 5406: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0
 - ▼ Ethernet II, Src: vmanfredis-MacBook-Pro-2.local (78:4f:43:73:43:26), Dst: 6e:57:ca:90:05:64 (6e:57:ca:90:05:64)
 - ▶ Destination: 6e:57:ca:90:05:64 (6e:57:ca:90:05:64)
 - ▶ Source: vmanfredis-MacBook-Pro-2.local (78:4f:43:73:43:26)
- Type: ARP (0x0806)

- ▼ Address Resolution Protocol (request)
 - Hardware type: Ethernet (1)
 - Protocol type: IPv4 (0x0800)
 - Hardware size: 6
 - Protocol size: 4
 - Opcode: request (1)
 - Sender MAC address: vmanfredis-MacBook-Pro-2.local (78:4f:43:73:43:26)
 - Sender IP address: vmanfredis-MacBook-Pro-2.local (172.20.10.11)
 - Target MAC address: 00:00:00_00:00:00 (00:00:00:00:00:00)
 - Target IP address: 172.20.10.1 (172.20.10.1)

Forwarding within same LAN

A wants to send pkt to B but B's MAC addr not in A's ARP table

1. A broadcasts ARP query containing B's IP addr


- destination MAC addr
 - FF-FF-FF-FF-FF-FF
- all nodes on LAN receive query

2. B receives ARP query

- replies to A with its MAC addr
- frame sent to A's MAC addr

3. A caches IP,MAC addr pair

- until TTL expires

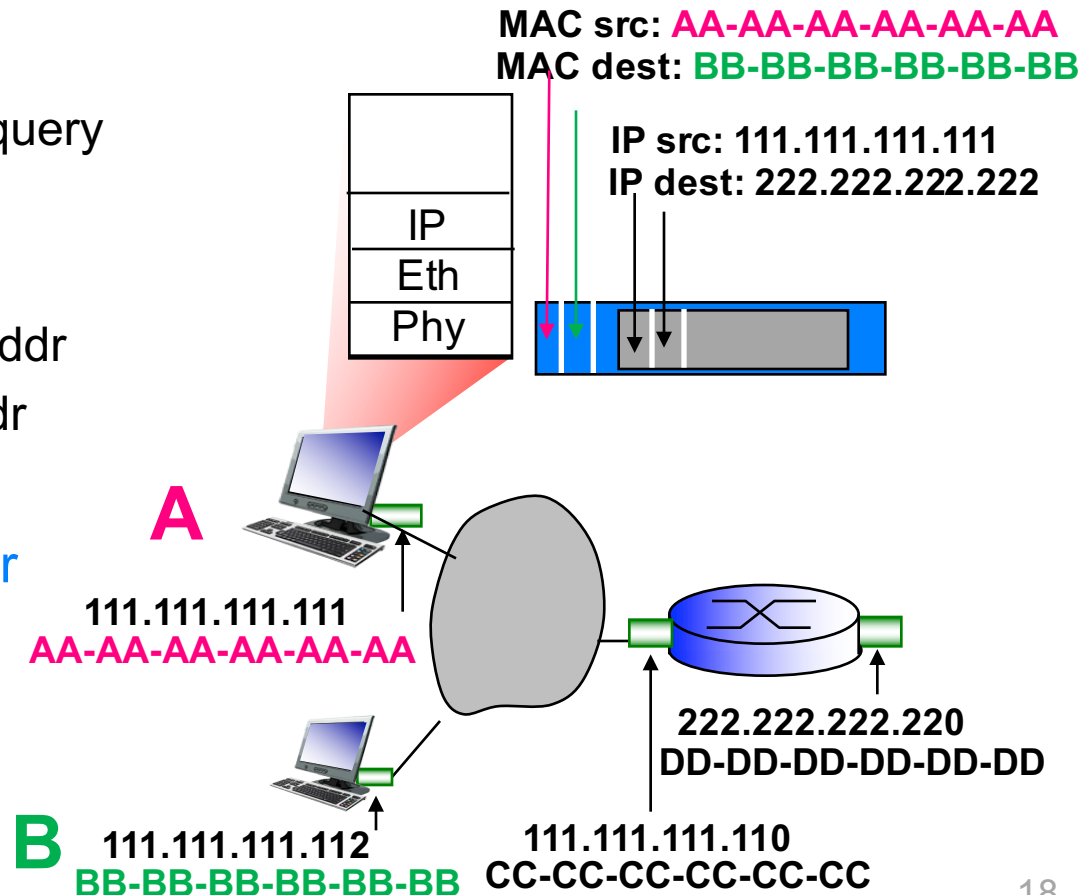


Routing to another LAN

Work through example on board

Routing to another LAN

Send pkt from A to B via gateway router C


- assume A knows B's IP addr, C's IP addr, C's MAC addr

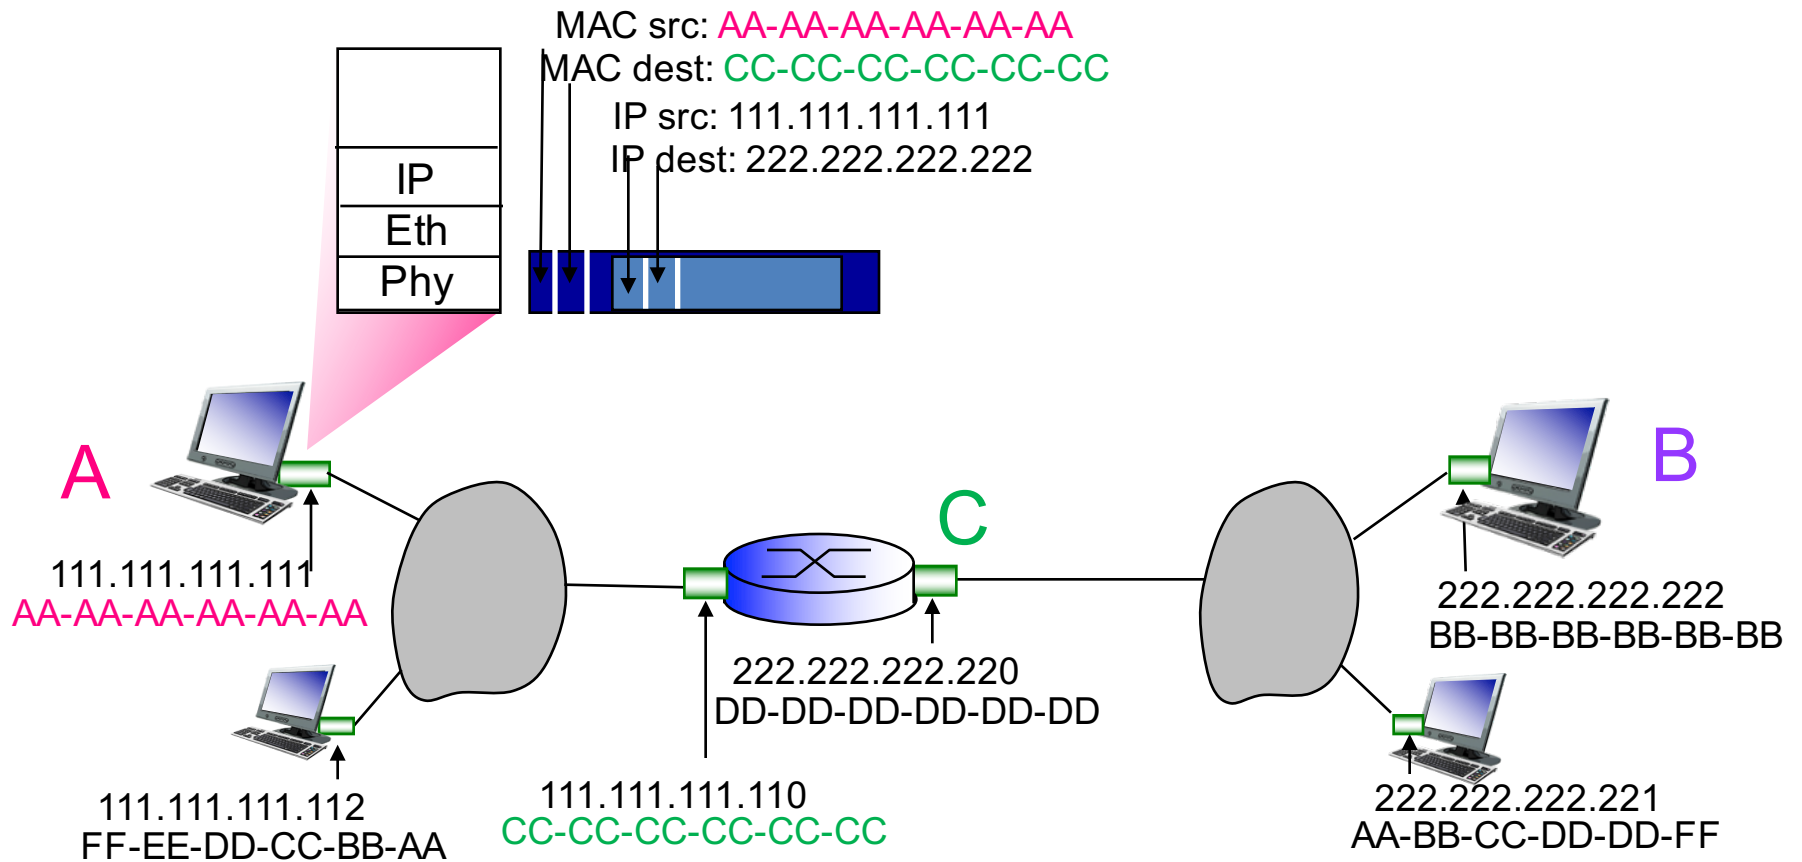

Routing to another LAN

Send pkt from A to B via gateway router C


- assume A knows B's IP addr, C's IP addr, C's MAC addr

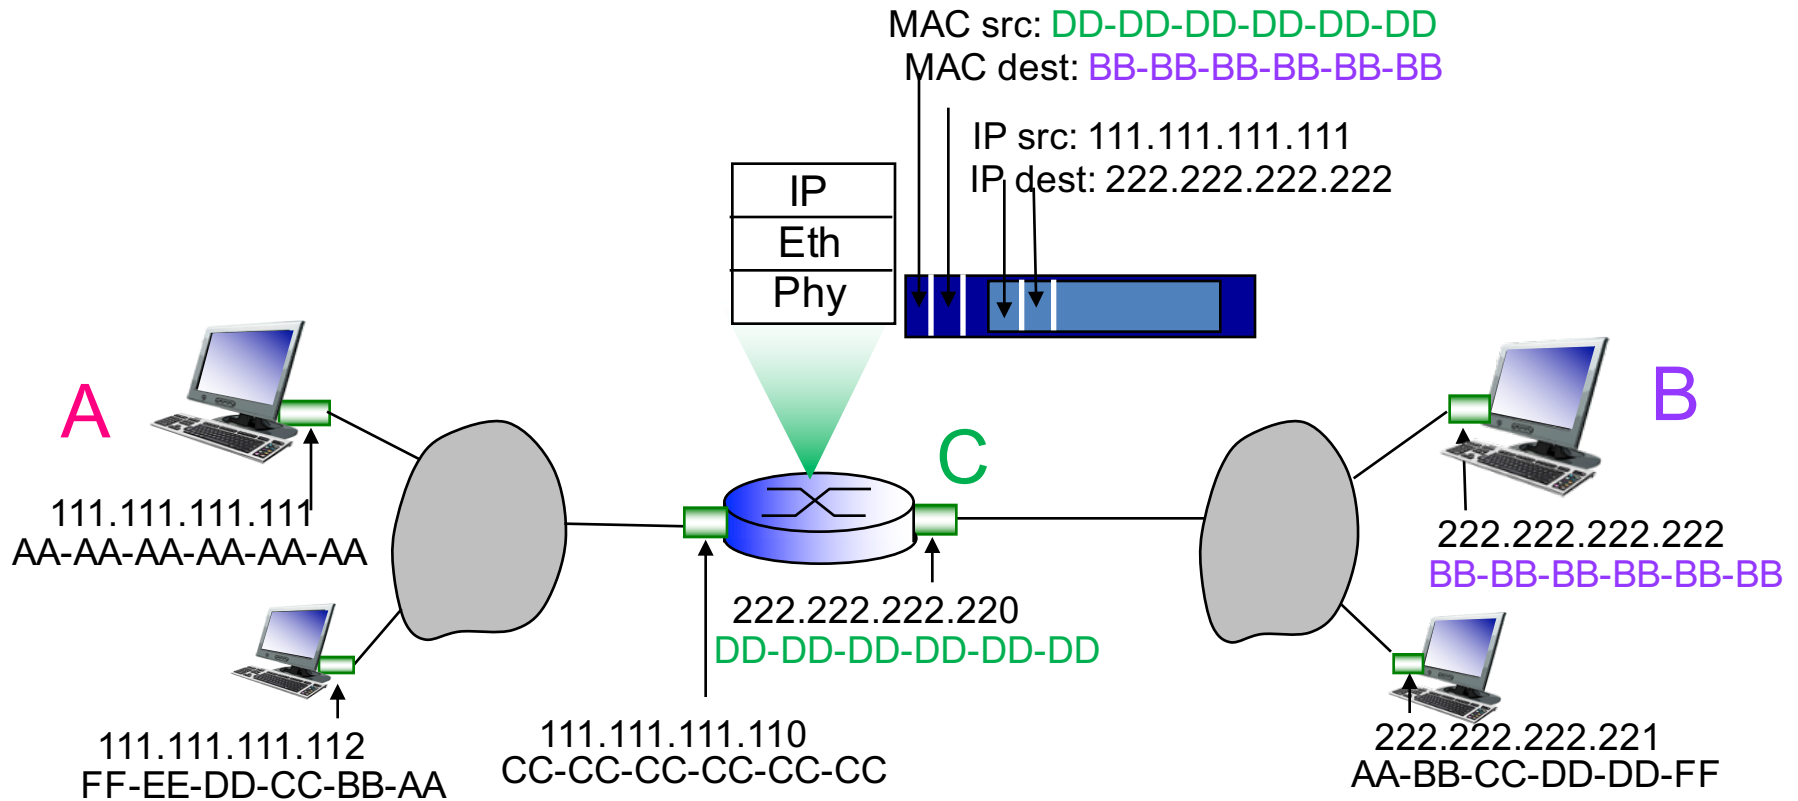

Routing to another LAN

Send pkt from A to B via gateway router C

- assume A knows B's IP addr, C's IP addr, C's MAC addr

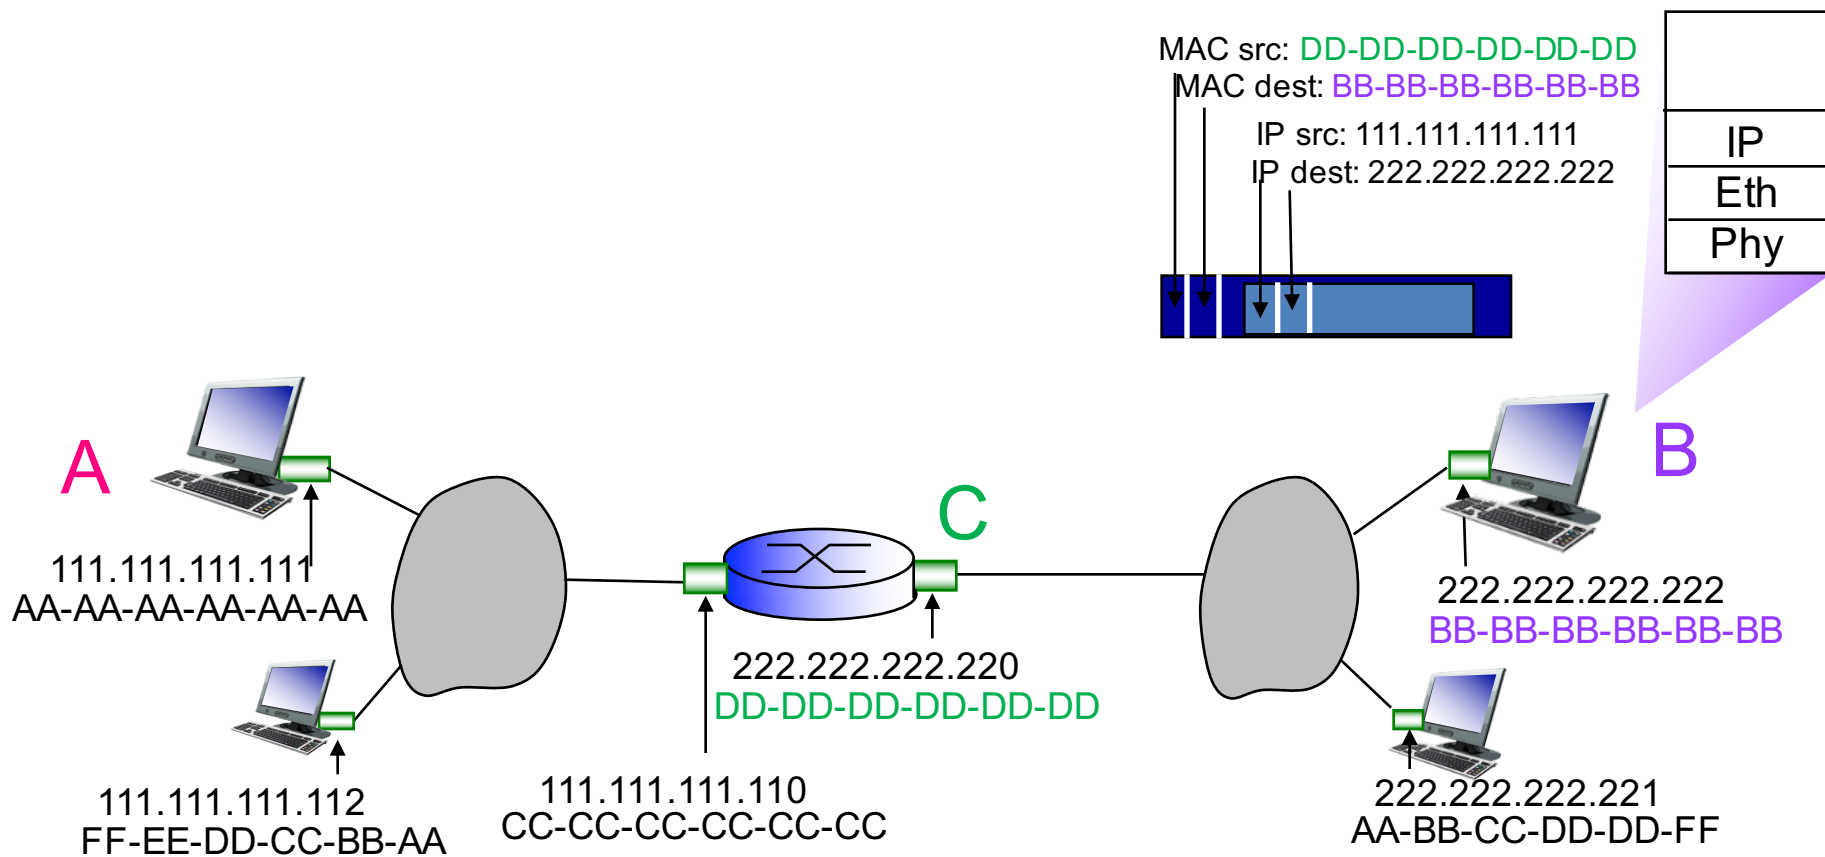

Link Layer **SWITCHES**

Ethernet switch

Ethernet

- dominant wired link layer protocol

Switch

- link-layer device to store and forward Ethernet frames
 - examine incoming **frame's MAC address**
 - **selectively** forward frame to one-or-more outgoing links
- **transparent**
 - hosts are unaware of presence of switches
- **self-learning**
 - switches do not need to be configured

Aside

- you'll see Ethernet listed as link layer protocol when you use wifi
 - quirk of wireshark, which we won't get into

Switches vs. routers


Both are store-and-forward

Routers

- data plane only examines network-layer headers
- control plane (BGP) may look at app layer

Switches

- examine link-layer headers

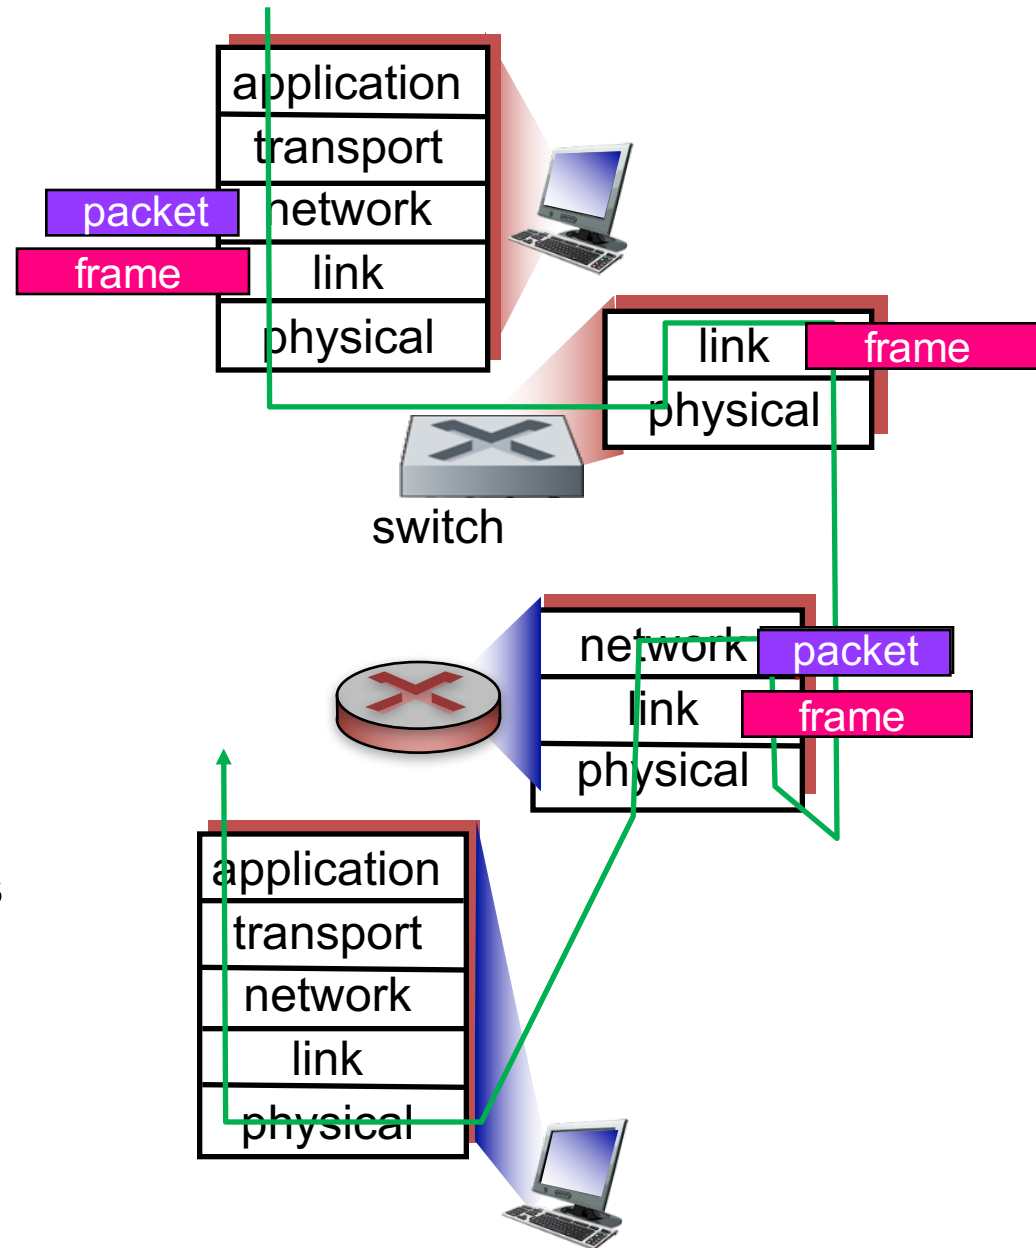

Switches vs. routers

Both have forwarding tables

Routers

- compute tables using routing algorithms, IP addr

Switches

- learn forwarding table using flooding, MAC addr

Q: Key differences between switches and routers?

